
EGE-M-ED Swivel connector

Male metric thread – ED-seal (ISO 9974) / EO 24° DKO swivel

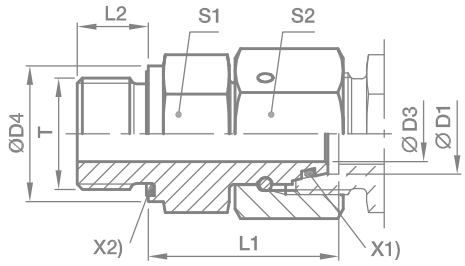

X2) Eolastic-sealing ED X1) O-ring OR

Series	D1	T	D3	D4	L1	L2	S1	S2	Weight g/1 piece	Order code*	PN (bar)[1] Steel	71
L[3])	06	M 10×1.0	2.5	14	24.5	8	14	14	27	**EGE06LMED**	500	315
	08	M 12×1.5	4.0	17	26.5	12	17	17	45	**EGE08LMED**	500	315
	10	M 14×1.5	6.0	19	27.5	12	19	19	57	**EGE10LMED**	500	315
	12	M 16×1.5	8.0	22	30.5	12	22	22	82	**EGE12LMED**	400	315
	12	M 22×1.5	8.0	27	27.0	14	27	22	92	**EGE12LM22X1.5ED**	400	315
	15	M 18×1.5	10.0	24	31.5	12	24	27	113	**EGE15LMED**	400	315
	15	M 22×1.5	10.0	27	32.0	14	27	27	142	**EGE15LM22X1.5ED**	400	315
	18	M 22×1.5	13.0	27	31.5	14	27	32	148	**EGE18LMED**	400	315
	22	M 26×1.5	17.0	32	32.5	16	32	36	203	**EGE22LMED**	250	160
	28	M 33×2.0	22.0	40	35.0	18	41	41	289	**EGE28LMED**	250	160
	35	M 42×2.0	28.0	50	42.5	20	50	50	511	**EGE35LMED**	250	160
	42	M 48×2.0	34.0	55	46.5	22	55	60	711	**EGE42LMED**	250	160
S[4])	06	M 12×1.5	2.5	17	27.0	12	17	17	47	**EGE06SMED**	800	630
	08	M 14×1.5	4.0	19	29.5	12	19	19	65	**EGE08SMED**	800	630
	10	M 16×1.5	6.0	22	32.0	12	22	22	91	**EGE10SMED**	800	630
	12	M 18×1.5	8.0	24	34.0	12	24	24	112	**EGE12SMED**	630	630
	16	M 22×1.5	11.0	27	37.0	14	27	30	174	**EGE16SMED**	630	400
	20	M 27×2.0	14.0	32	43.0	16	32	36	274	**EGE20SMED**	420	400
	25	M 33×2.0	18.0	40	48.0	18	41	46	497	**EGE25SMED**	420	400
	30	M 42×2.0	23.0	50	51.0	20	50	50	691	**EGE30SMED**	420	400
	38	M 48×2.0	30.0	55	60.0	22	55	60	957	**EGE38SMED**	420	315

[1]) Pressure shown = item deliverable

[3]) L = light series; [4]) S = heavy series

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Information on ordering alternative sealing materials see page I7.

*Please add the **suffixes** below according to the material/surface required

Order code suffixes			
Material	Suffix surface and material	Example	Standard sealing material (no additonal. suffix needed)
Steel	CF	EGE16SMEDCF	NBR
Stainless Steel	71	EGE16SMED71	VIT