
MAVE Pressure gauge swivel connector

Female BSPP thread / EO 24° DKO swivel
Port acc. to ISO 1179-1

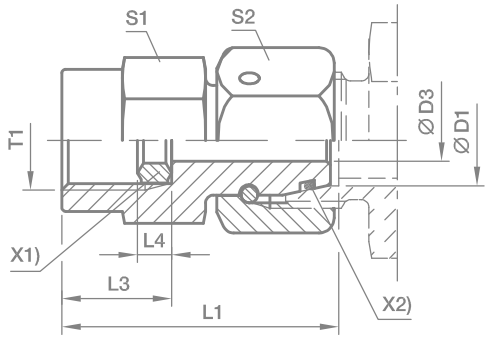

X1) Sealing-ring DKI
X2) O-ring OR

Series	D1	T1	D3	L1	L3	L4	S1	S2	Weight g/1 piece	Order code*	PN (bar)[1] Steel	71
L[3]	06	G 1/4	2.5	35.5	15.5	4.5	19	14	46	**MAVE06LR**	500	315
	08	G 1/4	4.0	35.5	15.5	4.5	19	17	52	**MAVE08LR**	500	315
	10	G 1/4	5.5	36.0	15.5	4.5	19	19	59	**MAVE10LR**	500	315
	12	G 1/4	5.5	36.0	15.5	4.5	19	22	70	**MAVE12LR**	400	315
S[4]	06	G 1/2	2.5	42.5	20.0	5.0	27	17	95	**MAVE06SR**	630	630
	06	G 1/4	2.5	35.5	15.5	4.5	19	17	52	**MAVE06SR1/4**	630	630
	08	G 1/2	4.0	43.0	20.0	5.0	27	19	100	**MAVE08SR**	630	630
	08	G 1/4	4.0	35.5	15.5	4.5	19	19	58	**MAVE08SR1/4**	630	630
	10	G 1/2	6.0	43.5	20.0	5.0	27	22	109	**MAVE10SR**	630	630
	10	G 1/4	7.0	39.0	15.5	4.5	19	22	67	**MAVE10SR1/4**	630	630
	12	G 1/2	7.0	45.0	20.0	5.0	27	24	125	**MAVE12SR**	630	630
	12	G 1/4	7.0	39.0	15.5	4.5	19	24	83	**MAVE12SR1/4**	630	630

[1]) Pressure shown = item deliverable
[3]) L = light series; [4]) S = heavy series

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Information on ordering alternative sealing materials see page I7.

*Please add the **suffixes** below according to the material/surface required.

Order code suffixes			
Material	Suffix surface and material	Example	Standard sealing material (no additonal. suffix needed)
Steel	CF	MAVE10SRCF	NBR
Stainless Steel	71	MAVE10SR71	VIT