
SV Bulkhead union

EO 24° cone end

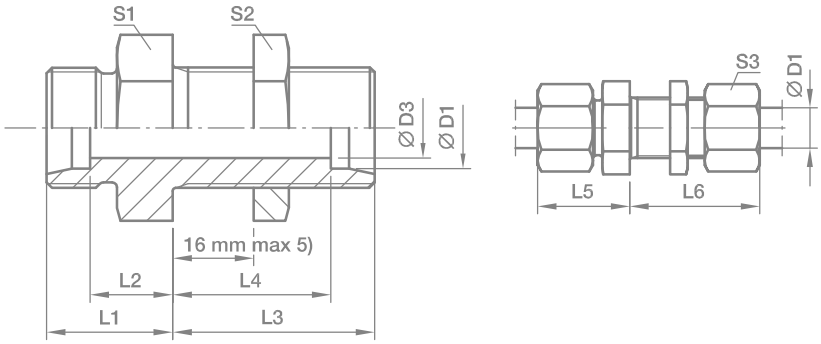

Series	D1	D3	L1	L2	L3	L4	L5	L6	S1	S2	S3	Weight g/1 piece	Order code*	PN (bar)[1] Steel	71	MS
L[3])	06	4	14	7.0	34	27.0	22	42	17	17	14	39	**SV06LOMD**	500	315	200
	08	6	15	8.0	34	27.0	23	42	19	19	17	50	**SV08LOMD**	500	315	200
	10	8	17	10.0	35	28.0	25	43	22	22	19	67	**SV10LOMD**	500	315	200
	12	10	17	10.0	36	29.0	25	44	24	24	22	78	**SV12LOMD**	400	315	200
	15	12	19	12.0	38	31.0	27	46	27	30	27	128	**SV15LOMD**	400	315	200
	18	15	21	13.5	40	32.5	30	49	32	36	32	198	**SV18LOMD**	400	315	200
	22	19	24	16.5	42	34.5	33	51	36	41	36	254	**SV22LOMD**	250	160	100
	28	24	26	18.5	43	35.5	35	52	41	46	41	335	**SV28LOMD**	250	160	100
	35	30	29	18.5	47	36.5	40	58	50	55	50	546	**SV35LOMD**	250	160	160
	42	36	30	19.0	47	36.0	42	59	60	65	60	758	**SV42LOMD**	250	160	160
S[4])	06	4	19	12.0	36	29.0	27	44	19	19	17	65	**SV06SOMD**	800	630	400
	08	5	20	13.0	36	29.0	28	44	22	22	19	87	**SV08SOMD**	800	630	400
	10	7	22	14.5	37	29.5	31	46	24	24	22	112	**SV10SOMD**	800	630	400
	12	8	22	14.5	38	30.5	31	47	27	27	24	141	**SV12SOMD**	630	630	400
	16	12	25	16.5	40	31.5	35	50	32	32	30	201	**SV16SOMD**	630	400	250
	20	16	28	17.5	44	33.5	39	55	41	41	36	462	**SV20SOMD**	420	400	250
	25	20	32	20.0	47	35.0	44	59	46	46	46	492	**SV25SOMD**	420	400	250
	30	25	35	21.5	51	37.5	48	64	50	50	50	631	**SV30SOMD**	420	400	250
	38	32	38	22.0	53	37.0	53	68	65	65	60	1083	**SV38SOMD**	420	315	

[1]) Pressure shown = item deliverable

[3]) L = light series; [4]) S = heavy series

[5]) Bulkhead thickness min.
06–18 L and 06–16 S = 3 mm
22–42 L and 20–38 S = 4 mm

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Delivery without nut and ring. Information on ordering complete fittings see page I7.

*Please add the **suffixes** below according to the material/surface required.

Order code suffixes		
Material	Suffix surface and material	Example
Steel	CF	SV16SOMDCF
Stainless Steel	71	SV16SOMD71
Brass	MS	SV16SOMDMS