
# EW Swivel nut elbow

## EO 24° cone end / EO 24° DKO swivel

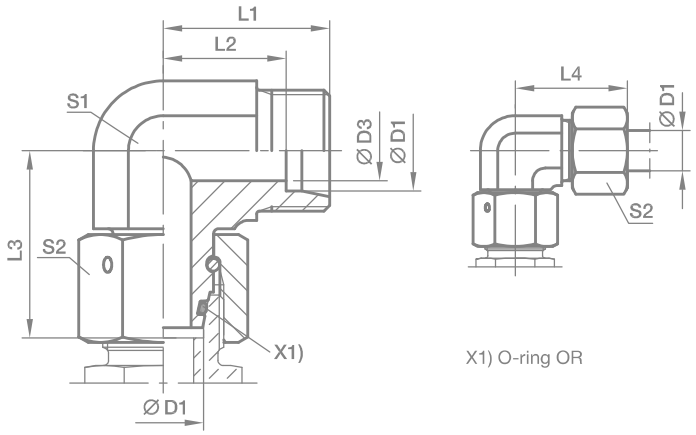


X1) O-ring OR

| Series | D1 | D3 | L1 | L2 | L3 | L4 | S1 | S2 | Weight g/1 piece | Order code* | PN (bar)[1] Steel | PN (bar)[1] 71 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| L[3] | 06 | 4 | 19 | 12.0 | 26.0 | 27 | 12 | 14 | 34 | **EW06LOMD** | 500 | 315 |
| | 08 | 6 | 21 | 14.0 | 27.5 | 29 | 12 | 17 | 43 | **EW08LOMD** | 500 | 315 |
| | 10 | 8 | 22 | 15.0 | 29.0 | 30 | 14 | 19 | 58 | **EW10LOMD** | 500 | 315 |
| | 12 | 10 | 24 | 17.0 | 29.5 | 32 | 17 | 22 | 81 | **EW12LOMD** | 400 | 315 |
| | 15 | 12 | 28 | 21.0 | 32.5 | 36 | 19 | 27 | 128 | **EW15LOMD** | 400 | 315 |
| | 18 | 15 | 31 | 23.5 | 35.5 | 40 | 24 | 32 | 197 | **EW18LOMD** | 400 | 315 |
| | 22 | 19 | 35 | 27.5 | 38.5 | 44 | 27 | 36 | 258 | **EW22LOMD** | 250 | 160 |
| | 28 | 24 | 38 | 30.5 | 41.5 | 47 | 36 | 41 | 370 | **EW28LOMD** | 250 | 160 |
| | 35 | 30 | 45 | 34.5 | 51.0 | 56 | 41 | 50 | 593 | **EW35LOMD** | 250 | 160 |
| | 42 | 36 | 51 | 40.0 | 56.0 | 63 | 50 | 60 | 993 | **EW42LOMD** | 250 | 160 |
| S[4] | 06 | 4 | 23 | 16.0 | 27.0 | 31 | 12 | 17 | 48 | **EW06SOMD** | 800 | 630 |
| | 08 | 5 | 24 | 17.0 | 27.5 | 32 | 14 | 19 | 65 | **EW08SOMD** | 800 | 630 |
| | 10 | 6 | 25 | 17.5 | 30.0 | 34 | 17 | 22 | 92 | **EW10SOMD** | 800 | 630 |
| | 12 | 8 | 29 | 21.5 | 31.0 | 38 | 17 | 24 | 107 | **EW12SOMD** | 630 | 630 |
| | 16 | 12 | 33 | 24.5 | 36.5 | 43 | 24 | 30 | 212 | **EW16SOMD** | 630 | 400 |
| | 20 | 16 | 37 | 26.5 | 44.5 | 48 | 27 | 36 | 309 | **EW20SOMD** | 420 | 400 |
| | 25 | 20 | 42 | 30.0 | 50.0 | 54 | 36 | 46 | 547 | **EW25SOMD** | 420 | 400 |
| | 30 | 25 | 49 | 35.5 | 55.0 | 62 | 41 | 50 | 744 | **EW30SOMD** | 420 | 400 |
| | 38 | 32 | 57 | 41.0 | 63.0 | 72 | 50 | 60 | 1222 | **EW38SOMD** | 420 | 315 |

[1]) Pressure shown = item deliverable

[3]) L = light series; [4]) S = heavy series

$\frac{\text{PN (bar)}}{10} = \text{PN (MPa)}$

**Delivery without nut and ring. Information on ordering complete fittings or alternative sealing materials see page I7.**

*Please add the **suffixes** below according to the material/surface required.

| Order code suffixes | | | |
|---|---|---|---|
| Material | Suffix surface and material | Example | Standard sealing material (no additonal. suffix needed) |
| Steel | CF | EW16SOMDCF | NBR |
| Stainless Steel | 71 | EW16SOMD71 | VIT |